




## Wireless receiver RF Rx SW915-TCP/IP Material number: 1266820

### Features/Options:

- sWave® wireless technology
- Communication via UDP or TCP/IP (Server or Client - Mode)
- Webserver based Setup

- Transmitter/receiver assignment by teaching mode
- LEDs for indication of operating state
- SMA plug-in connector for external antenna

### Dimensions

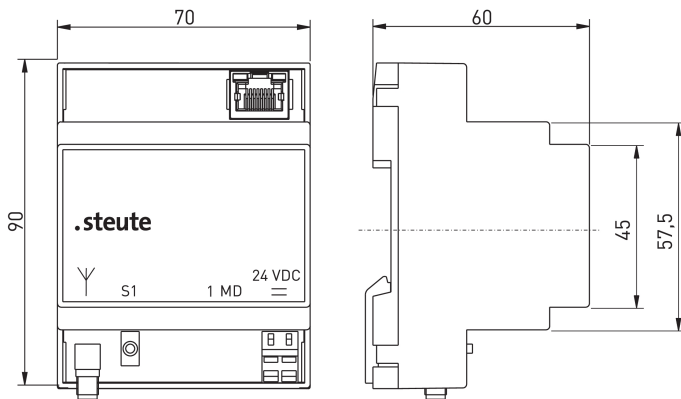

### Technical data

Standards	EN 60947-5-1; EN 61000-6-2, -6-3, EN 61000-4-2, -4-20, -4-4, -4-5, -4-6; EN 60068-2-6, EN 60068-2-27; EN 301 489-1; EN 301 489-3; EN 300 220-1; EN 300 220-2
Mounting	DIN rail mounting
Connection	terminals with CAGE CLAMP WAGO Series 236: 0.08 ... 2.5 mm <sup>2</sup> / AWG 28-12, AWG 12: THHN, THWN, stripping length 5 ... 6 mm / 0.22 in
Network interface	10/100 Base-T Ethernet (Auto detection) via RJ 45
Software interface	TCP (Client, Server) / UDP / IP (DHCP)
Degree of protection	IP 20 to IEC/EN 60529
Rated operating current I <sub>e</sub>	24 VDC: max. 0.06 A
Rated operating voltage U <sub>e</sub>	24 VDC -15 % ... +10 %
Frequency	915 MHz (USA, Canada and Mexico)
Display	green LED: Reset state orange LED: signalisation of telegram
Degree of pollution	2 to IEC/EN 60664-1
Ambient temperature	0 °C ... +55 °C
Storage and shipping temperature	-25 °C ... +85 °C
External antenna	always required for optimum wireless range
Approvals	USA: FCC: XK5-RFRXSW915; Canada: IC: 5158A-RFRXSW915 Mexico: IFT/223/UCS/DG-AUSE/6773/2017



Errors and omissions excepted.



Wireless receiver  
RF Rx SW915-TCP/IP  
Material number: 1266820